
## **Brief Introduction:**

the **spray cooling tunnel** is apply to different kind of field, such as food, chemistry, cosmetics and so on.

## Technical parameter:

| Туре              | Air-cooled / Water-cooled              |
|-------------------|--|
| Weight            | 150Kg/Meter                            |
| Capacity          | 100-2000Kg/Hr                          |
| Speed             | Adjustable 1~15 M/min                  |
| Voltage           | 220V/380V                              |
| Power             | 10-45KW                                |
| Tunnel Temp       | 0~10°C                                 |
| Material of Frame | Stainless Steel                        |
| Material of Belt  | White PU Belt (Food industry Chemical) |
| Application       | Food Industrial Chemical Cooling       |
| Drive Motor       | SEW / CPG 1.1~5.5KW                    |
| Compressor        | BITZER / COPELAND 5~25 Hp              |
| Condenser         | BITZER / COPELAND                      |
| Warranty          | 1 Year                                 |
| Package           | Wooden Case                            |
| Holding Time      | 1~60 min                               |
| Control Models    | PLC & Touch Panel                      |
| Working Temp      | -10~10 °C                              |
| Common Size       | W=1150/1450/1750(mm)                   |
| Detailed nicture  |  |


Detailed picture:

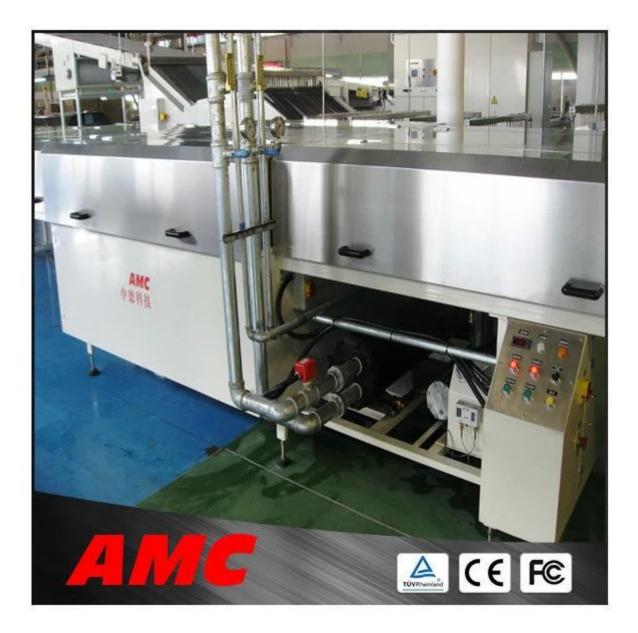





AMC was established in 2004, which is a high tech enterprise with a number of patented inventions as well as professional R&D and sales team.

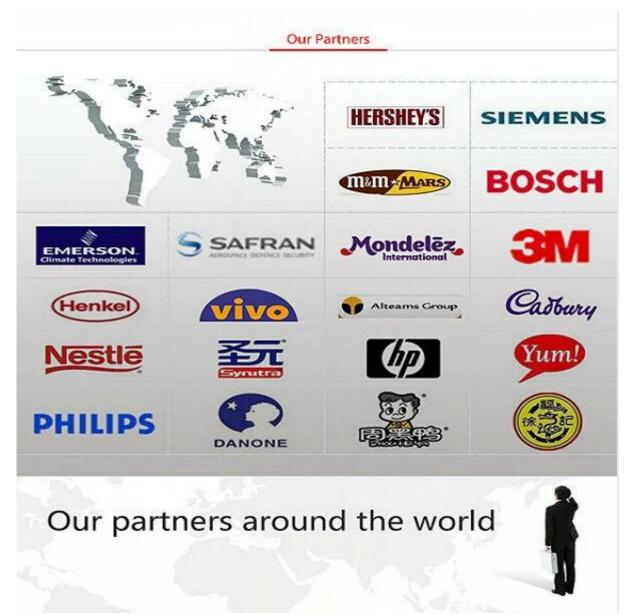

Our outdoor activities:

